
### **WCP-11C** User Instructions

V0.1

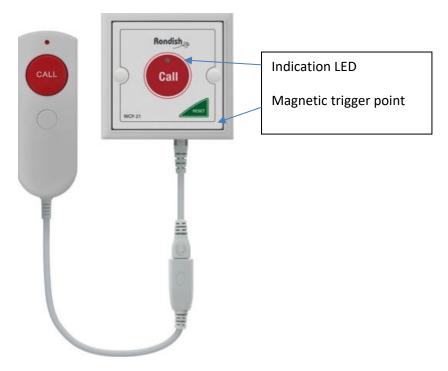

## **Activate/Deactivate Tracking**

- Apply magnet until the LED begins flashing, then press and hold Reset
- The LED will flash rapidly to indicate tracking is enabled
- The LED will be steady on to indicate tracking is disabled

# **Call Trigger**

- Press the Call button
- Double-pressing Call will activate an Emergency call
- Press Reset to cancel the call

**WARNING:** Risk of explosion if battery is replaced by an incorrect type. Replace only with the same or equivalent type.

**CAUTION:** Lithium batteries cannot be disposed of with normal household waste. For disposal or recycling instructions please contact your local authorities.

## **Programming**

- Enter programming by applying a magnet to the trigger point and holding Call the indication LED will stay ON when it is ready. When you have completed the input string the WCP-11C will automatically exit programming
- Enter code 28 to change program settings
- Key in 13 digits: t T1T2 D1D2D3D4D5D6 P LLL, where
- t = 1
- T1T2 Alarm type
  - o Alarm 06 (default)
  - o Emergency 07
- D1...D6 6-digit Device ID
- P Product code
  - Toilet button 3
  - Bedhead unit 8 (default)
- LLL Area code

#### **Behavior Chart**

Call Triggered – includes Call button and handset	Beeps, LED stays ON for 15s
Emergency	Beeps, LED flashes for 15s
Triggered	
Call Reset	Beeps, LED flashes 3x
Low Battery	LED blinks once every 5s

# Compatibility

Room Indicators	ILB-21 Over Door Light (LoRa)
Call Systems	ZP-01(S) Network Repeater
	DON-20 Receiver Dongle
Pagers	PAG-11 Caregiver Alert Pager
	PAG-31 Economy Pager
Nurse Call Interface	CMEX-11 Fixed ¼" Jack
	CMEX-21 Removable Fly Cable
Accessories	NEC-12 Nurse Call Handset
	MB-01 Single-Gang Bracket
	CR2477 Lithium Batteries